



PROFIRE E SERIES

TECHNICAL DATA INFORMATION PACKET

Technical Data

E Series

Uncontrolled Emissions Configuration (EG, EL, ELG)

8.4 - 42.0 MM BTU/H NG; 60 - 300 GPH #2 OIL

UL listed with choice of NFPA, CSD-1, GAP, and FM for U.S. or Canadian units

Standard equipment:	Combustion Control System options:	Fuel options:
3450 RPM motor, panel signal lights (Power On, Main Fuel, Ignition, Flame Failure), combustion air proving switch, high fire air proving switch, 120/1/60 control circuit, burner mounted panel, hinged blast tube with left-hand swing. Gas and gas/oil units only: butterfly rate control valve, high/low gas pressure switches, two gas shutoff cocks, main gas regulator, shipped loose gas train.	Parallel Positioning Combustion Control System with O ₂ Trim and Variable Frequency Drive (VFD)	Main Fuel: Natural gas (EG), #2 oil - air atomized (EL) or Combination gas/#2 oil - air atomized (ELG). Igniter Fuel: Natural gas and/or propane. Fuel Changeover Switch: Combination gas/oil units only (ELG).

Series Features

◊ Optional Feature

	E-84 to E-105	E-126 to E-147	E-168 to E-210	E-252 to E-294	E-336 to E-378	E-420
Flame Safeguard						
UV Scanner	•	•	•	•	•	•
Turndown						
Up to 10:1 on Natural Gas & Up to 8:1 on #2 Oil	•	•	•	•	•	•
Mode of Operation						
Full Modulation Firing	•	•	•	•	•	•
Auto-Manual Firing Rate Control	• ¹	• ¹	• ¹	• ¹	• ¹	• ¹
Refractory						
Dry Oven & Gasket	◊ ²	◊ ²	◊ ²	◊ ²	◊ ²	◊ ²
Ignition						
Gas/Electric Pilot and Ignition Transformer	•	•	•	•	•	•
#2 Oil Pilot (EL, ELG)	◊	◊	◊	◊	◊	◊
Oil Components						
3-Way Solenoid Valve	•	•	•			
2-Way Solenoid Valve	•	•	•	•	•	•
3-Way Motorized POC Valve	◊	◊	◊	•	•	•
2-Way Motorized POC Valve	◊	◊	◊	◊	◊	◊
Atomizing Air Proving Switch	•	•	•	•	•	•
Low Oil Pressure Switch	•	•	•	•	•	•
Burner Mounted Oil Metering System	•	•	•	•	•	•
Separately Mounted Air Compressor Module	•	•	•	•	•	•
Gas Components						
Motorized Valve w/ POC & Solenoid Valve	•					
Motorized Valve w/ POC (2)	◊	◊	◊	◊	◊	◊
Motorized w/ POC & Motorized w/o POC	◊	•	•	•	•	•
Normally Open Vent Valve	◊	•	•	•	•	•

¹ Standard for full modulation; optional on select parallel positioning systems

² Refractory dry ovens are required for burner mounting, consult factory for options

Standard Ratings

E Series

EG - EL - ELG: Gas, #2 Oil, Gas/Oil Configuration



	Gas Input MBH	#2 Oil Input GPH	BHP @ 80% Eff.	Blower Motor HP	Separate Compressor Module Motor HP 3 Phase	Oil Metering System Motor HP 3 Phase	Furnace Pressure ("w.c.)	Standard Gas Train Pipe Size (in.)	Gas Pressure Required (PSI)	
Model No. & Frame Size										
E-84-1	8,400	60	200	5	3	1/2	4	2 1/2	2.1	208 / 230 / 460 / 3
E-105-1	10,500	75	250	5	3	1/2	4	3	2.2	
E-126-1	12,600	90	300	7 1/2	3	1/2	4	3	2.5	
E-147-1	14,700	105	350	10	5	1/2	4	3	2.7	
E-168-2	16,800	120	400	15	5	1/2	6	3	3.0	
E-210-2	21,000	150	500	15	5	3/4	6	3	3.9	230 / 460 / 3
E-252-2	25,200	180	600	15	7 1/2	3/4	7.5	3	4.3	
E-294-3	29,400	210	700	20	7 1/2	3/4	7	3	2.6	
E-336-3	33,600	240	800	25	7 1/2	3/4	9	3	3.1	460 / 3
E-378-3	37,800	270	900	30	15	1	8	4	3.6	
E-420-3	42,000	300	1,000	40	15	1	8	4	3.7	

Input is based on fuel BTU content, listed furnace pressure and altitude of 2,000 feet or less. If altitude > 2,000 feet and < 8,000 feet, derate capacity 4% per 1,000 feet over 2,000. Consult factory for higher altitudes. If furnace pressure exceeds listed value, derate capacity 5% for every 0.5" w.c. of pressure in excess of stated. Consult factory if derate exceeds 20%. Gas input is based on natural gas with 1,000 BTU/cu.ft. and 0.60 gravity. For total pressure at manifold, add furnace pressure. Oil input based on 140,000 BTU/gal. Consult factory for 50 Hz. applications.

Standard Dimensions

E Series

EG - EL - ELG: Gas, #2 Oil, Gas/Oil Configuration

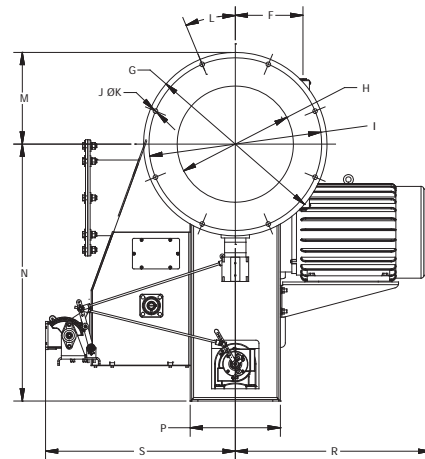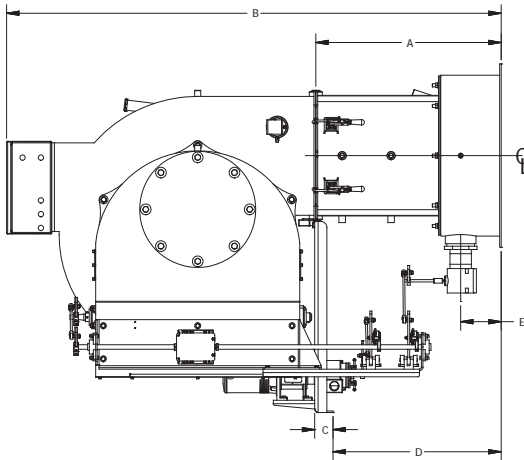

DIM	Burner Frame Size & Model Number			
	Size 1	Size 2	Size 3	
Length in inches				
Overall length	B	61 1/2	77 1/4	87
Width in inches				
Center line to right side	R	18	23	32
Center line to left side	S	25 1/8	26 1/8	31 1/4
Height in inches				
Center line to top	M	10 1/2	13	15
Center line to bottom	N	28 5/8	36 1/2	42
Hinge pivot point in inches				
Mounting flange to hinge	A	26 1/4	34	36 1/4
Center line to hinge	F	8	9 1/2	11
Mounting flange dimensions in inches				
Outer diameter	G	21	26	30
Inner diameter	H	13 3/8	16	19
Diameter of bolt circle	I	19 1/4	24	28 1/4
Number of mounting holes	J	8	12	8
Diameter of bolt hole	K	3/4	3/4	3/4
Offset of bolt circle starting point	L	0	15	0
Burner support in inches				
Support length	C	2 3/4	2 3/4	3
Support width	P	9 1/2	13	14 3/4
Mouting flange to support	D	23 5/8	31 1/2	33 1/2
Gas inlet dimensions in inches				
Mounting flange to gas inlet	E	3 5/8	5	6 5/8

Accompanying dimensions, while sufficiently accurate for layout purposes, must be confirmed for construction.

Technical Data

E Series

<30 PPM Low NOx Configuration (LNE, LNEG)

8.4 - 42.0 MM BTU/H NG; 60 - 300 GPH #2 OIL

**UL listed with choice of
NFPA, CSD-1, GAP, and FM
for U.S. or Canadian units**

Standard equipment:	Combustion Control System options:	Fuel options:
3450 RPM motor, panel signal lights (Power On, Main Fuel, Ignition, Flame Failure), FGR, combustion air proving switch, high fire air proving switch, 120/1/60 control circuit, burner mounted panel, hinged blast tube with left-hand swing. Gas and gas/oil units only: butterfly rate control valve, high/low gas pressure switches, two gas shutoff cocks, main gas regulator, shipped loose gas train.	Parallel Positioning Combustion Control System with O ₂ Trim and Variable Frequency Drive (VFD)	Main Fuel: Natural gas (LNEG), or Combination gas/ #2 oil - air atomized (LNELG). Igniter Fuel: Natural gas and/or propane. Fuel Changeover Switch: Combination gas/oil units only (LNELG).

Series Features

◊ Optional Feature

	LNE-84 to 105	LNE-126 to 147	LNE-168 to 210	LNE-252 to 294	LNE-336 to 378	LNE-420
Flame Safeguard						
UV Scanner	•	•	•	•	•	•
Turndown						
Up to 8:1 on Natural Gas	•	•	•	•	•	•
Mode of Operation						
Full Modulation Firing	•	•	•	•	•	•
Auto-Manual Firing Rate Control	◊ ¹	◊ ¹	◊ ¹	◊ ¹	◊ ¹	◊ ¹
Refractory						
Dry Oven & Gasket	◊ ²	◊ ²	◊ ²	◊ ²	◊ ²	◊ ²
Ignition						
Gas/Electric Pilot and Ignition Transformer	•	•	•	•	•	•
Oil Components						
3-Way Solenoid Valve	•	•	•			
2-Way Solenoid Valve	•	•	•	•	•	•
3-Way Motorized POC Valve	◊	◊	◊	•	•	•
2-Way Motorized POC Valve	◊	◊	◊	◊	◊	◊
Atomizing Air Proving Switch	•	•	•	•	•	•
Low Oil Pressure Switch	•	•	•	•	•	•
Burner Mounted Oil Metering System	•	•	•	•	•	•
Separately Mounted Air Compressor Module	•	•	•	•	•	•
Gas Components						
Motorized Valve w/ POC & Solenoid Valve	•					
Motorized Valve w/ POC (2)	◊	◊	◊	◊	◊	◊
Motorized w/ POC & Motorized w/o POC	◊	•	•	•	•	•
Normally Open Vent Valve	◊	•	•	•	•	•

¹ Standard for full modulation; optional on select parallel positioning systems

² Refractory dry ovens are required for burner mounting, consult factory for options

Standard Ratings

E Series

LNEG - LNELG: <30 PPM Low NOx - Gas, Gas/Oil Configuration



	Gas Input MBH	#2 Oil Input GPH	BHP @ 80% Eff.	Blower Motor HP	Separate Compressor Module Motor HP 3 Phase	Oil Metering System Motor HP 3 Phase	Furnace Pressure ("w.c.)	Standard Gas Train Pipe Size (in.)	Gas Pressure Required (PSI)	FGR Line Piping Size
Model No. & Frame Size										
LNE-84-1	8,400	60	200	5	3	1/2	4	2 1/2	2.1	6
LNE-105-1	10,500	75	250	7 1/2	3	1/2	4	3	2.2	6
LNE-126-1	12,600	90	300	7 1/2	3	1/2	4	3	2.5	6
LNE-147-1	14,700	105	350	10	5	1/2	4	3	2.7	6
LNE-168-2	16,800	120	400	15	5	1/2	6	3	3.0	8
LNE-210-2	21,000	150	500	20	5	3/4	6	3	3.9	8
LNE-252-2	25,200	180	600	25	7 1/2	3/4	6.5	3	4.3	8
LNE-294-3	29,400	210	700	30	7 1/2	3/4	8	3	2.6	10
LNE-336-3	33,600	240	800	40	7 1/2	3/4	9	3	3.1	10
LNE-378-3	37,800	270	900	40	15	1	8	3	3.6	12
LNE-420-3	42,000	300	1,000	50	15	1	8	4	3.7	12

Input is based on fuel BTU content, listed furnace pressure and altitude of 2,000 feet or less. If altitude > 2,000 feet and < 8,000 feet, derate capacity 4% per 1,000 feet over 2,000. Consult factory for higher altitudes. If furnace pressure exceeds listed value, derate capacity 5% for every 0.5" w.c. of pressure in excess of stated. Consult factory if derate exceeds 20%. Gas input is based on natural gas with 1,000 BTU/cu.ft. and 0.60 gravity. For total pressure at manifold, add furnace pressure. Oil input based on 140,000 BTU/gal. Consult factory for 50 Hz. applications.

Standard Dimensions

E Series

LNEG - LNELG: <30 PPM Low NOx - Gas, Gas/Oil Configuration

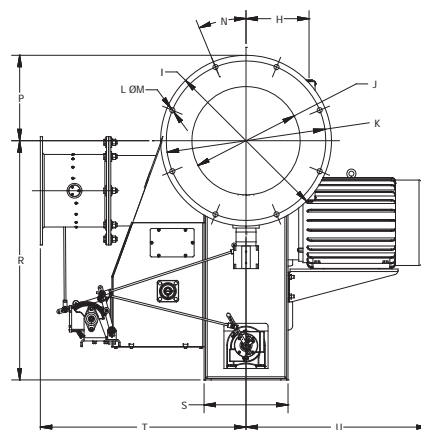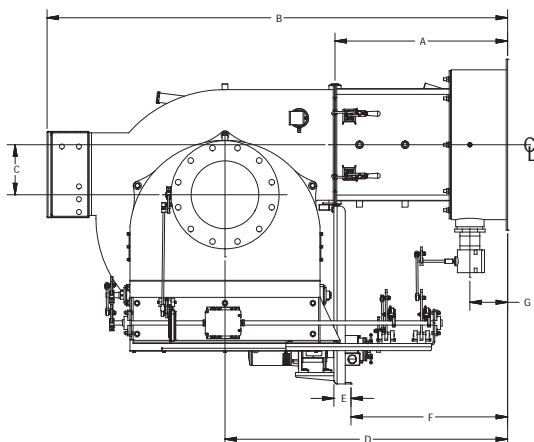

	Burner Frame Size & Model Number			
	DIM	Size 1	Size 2	Size 3
Length in inches				
Overall length	B	61 1/2	77 1/4	87
Width in inches				
Center line to left side	T	23 7/8	26 1/2	36 1/8
Center line to right side	U	18	23	32
Height in inches				
Center line to top	P	10 1/2	13	15
Center line to bottom	R	28 5/8	36 1/2	42
Hinge pivot point in inches				
Mounting flange to hinge	A	26 1/4	34	36 1/4
Center line to hinge	H	8	9 1/2	11
Mounting flange dimensions in inches				
Outer diameter	I	21	26	30
Inner diameter	J	13 3/8	16	19
Diameter of bolt circle	K	19 1/4	24	28 1/4
Number of mounting holes	L	8	12	8
Diameter of bolt hole	M	3/4	3/4	3/4
Offset of bolt circle starting point	N	0	15	0
Burner support in inches				
Support length	E	2 3/4	2 3/4	3
Support width	S	9 1/2	13	14 3/4
Mouting flange to support	F	23 5/8	31 1/2	33 1/2
Gas inlet dimensions in inches				
Mounting flange to gas inlet	G	3 5/8	5	6 5/8
FGR dimensions in inches				
Center line to center line of FGR	C	1 7/8	6	8 3/4
Mouting flange to center line of FGR	D	39 3/8	50	55 5/8

Accompanying dimensions, while sufficiently accurate for layout purposes, must be confirmed for construction.



Packaged Burner Systems
351 21st Street, Monroe, WI 53566 USA
608.325.3141 · info@cleaverbrooks.com
cleaverbrooks.com