



GAUGE HATCH

MODEL 61T



MODEL 61T

The Groth Model 61T Gauge Hatch provides access for gauging or obtaining product samples from storage tanks. The gauge hatch has a gauge hook integrated to the base to facilitate sampling the tank. The Model 61T Gauge Hatch incorporates “cushioned-air” seating which assures a superior seal to ensure minimal fugitive emissions.

Technical Details

- Sizes: 4” (100 mm) to 10” (250 mm)
- Material of Construction: Aluminum (Non-Sparking), Carbon Steel, Stainless Steel
- Bolting: 150# ASME, PN 10 DIN, PN 10/16 DIN, PN 16 DIN, Un-drilled
- Diaphragm: Buna-N (black), FKM (blue), or FEP (clear)



Features

- Permits the use of both hands during gauging or sampling
- Ultra-tight sealing reduces product leakage and fugitive emissions
- Designed for easy maintenance, thus reducing downtime and lowering operational cost
- Gauge hatch is able to be mounted to 150# ASME flanges or DIN bolting
- Incorporates a mechanical lock system to be used with a pad lock or lock out bar
- Bonding straps are standard
- Foot Pedal with serrated treadle surface to avoid foot slippage when opening




SPECIFICATIONS

Size	A		B		C		D
	in	(mm)	in	(mm)	in	(mm)	Degree
4" (100mm)	9.03	229.4	12.27	311.5	6.35	161.2	97°
6" (150mm)	11.20	284.5	14.28	362.6	6.54	166.1	105°
8" (200mm)	13.49	342.7	16.94	430.3	6.91	175.6	110°
10" (250mm)	15.98	405.9	19.28	489	7.52	191	93°

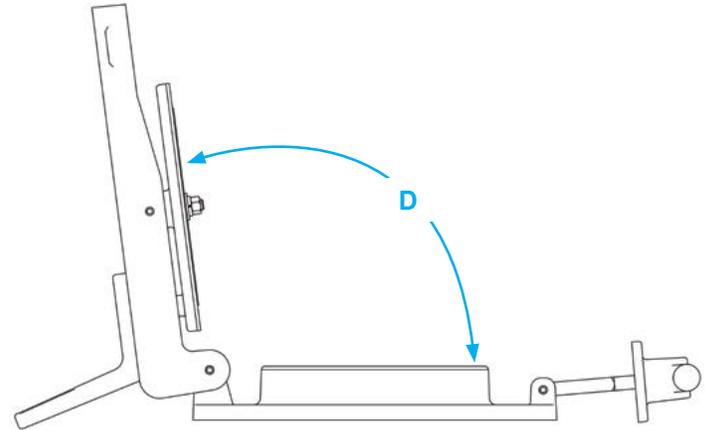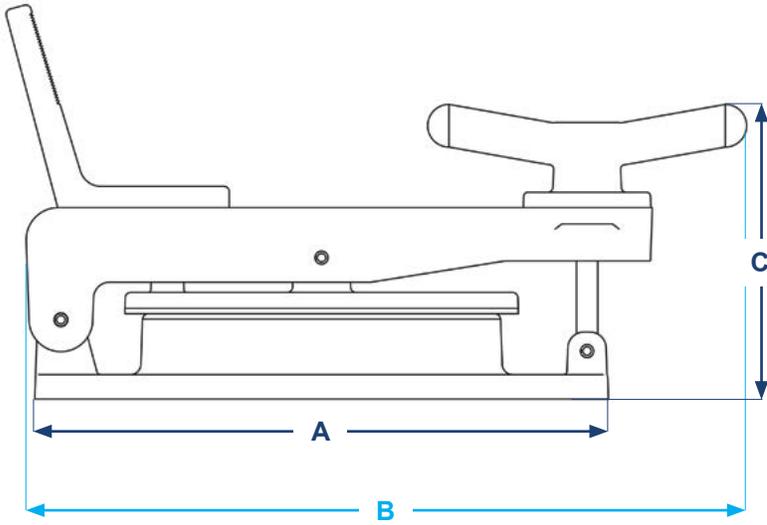

HOW TO ORDER

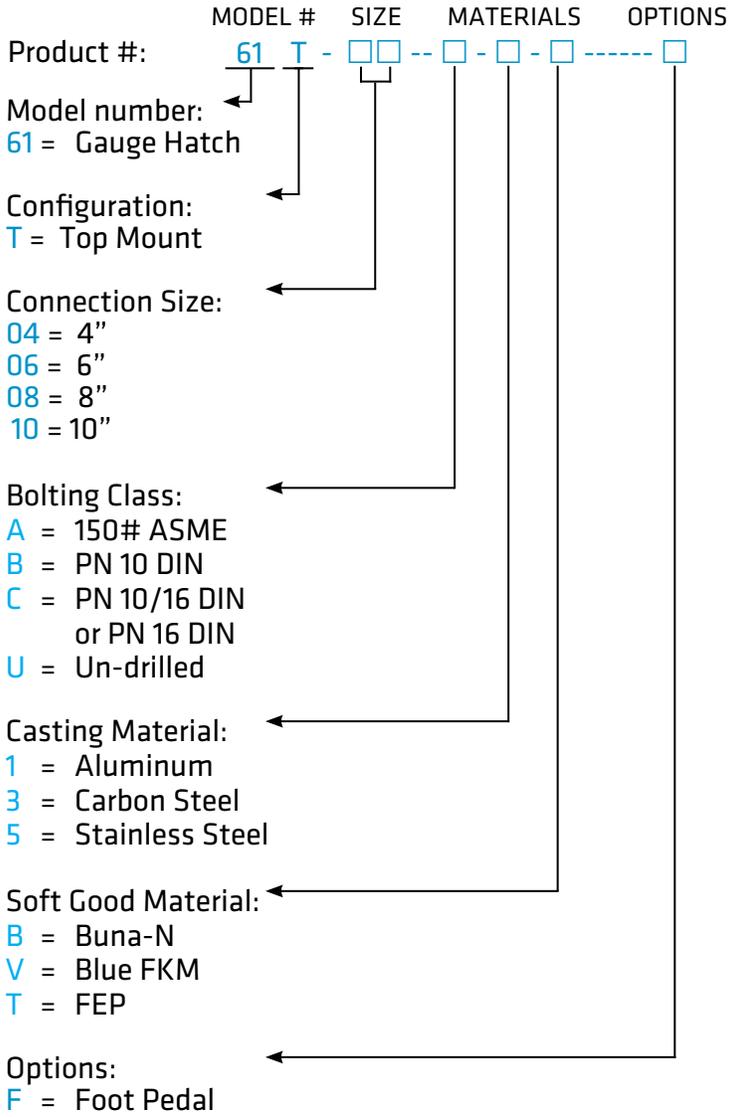

GROTHCORP.COM